


# PRODUCT PARAMETER

| Item #: | DLW54BF | _ Project: |  |
|---------|---------|------------|--|
|         |         |            |  |

Qty: \_\_\_\_\_ Date: \_\_\_\_ Approval: \_\_\_\_

KICHKING 54" Commercial Reach-In Freezer- Solid Door Two Section Stainless Steel Freezer

SKU:DLW54BF

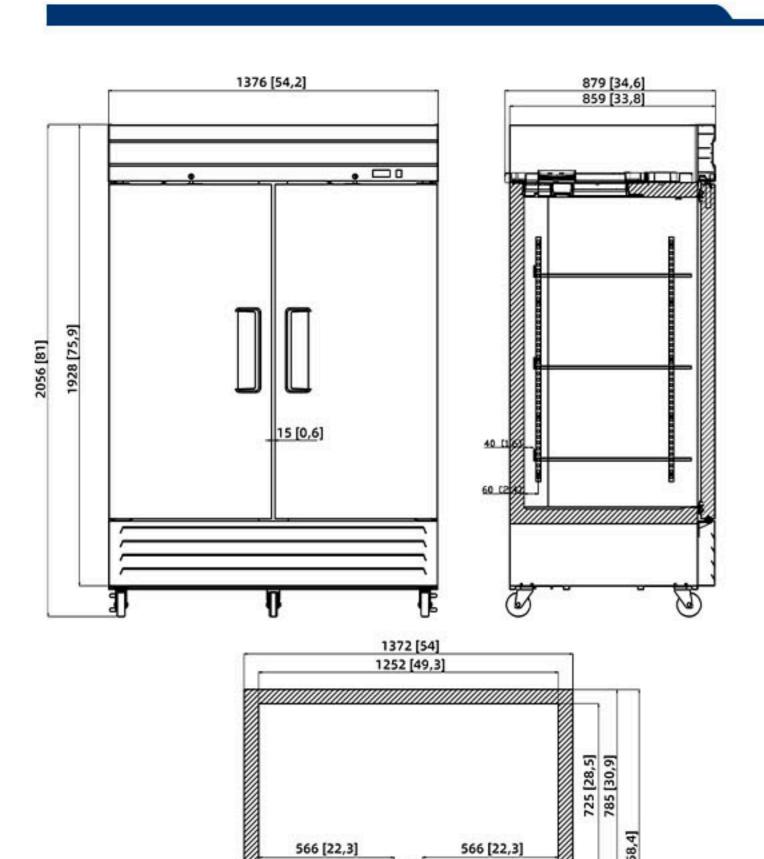





#### **Technical Data**

| Width             | 54.1 inches |
|-------------------|-------------|
|                   |             |
| Depth             | 33.9 inches |
|                   |             |
| Height            | 80.3 inches |
|                   |             |
| Power Cord Length | 78.7 inches |
|                   |             |
| Shelf Width       | 25 inches   |
|                   |             |
| Shelf Depth       | 30 inches   |

### **Features**

- Powerful Refrigeration&Energy Saving
- 3rd Generation Dynamic Cooling System
- Easy to clean and improve efficiency
- Digital Display& Electric Defrost
- Warranty Service: 3 years warranty on machine and 5 years warranty on compressor.

### Certifcations



ETL, US



5-15P



**ETL Sanitation** 

## TECHNICAL DETAILS

| SKU                                 | DLW54BF   |
|-------------------------------------|---|
| Product Dimensions                  | 54.1x33.9x80.3 inches   |
| Volume                              | 49cuft  |
| Refrigerant Type                    | R290  |
| Voltage                             | 115V/60HZ   |
| Power                               | 740w  |
| Shelves                             | 6   |
| Shell Material Thickness            | Stainless steel # SS 0.4mm                                      |
| Inner liner material thickness      | Stainless Steel Plate 0.4mm                                     |
| Door shell material thickness       | Stainless steel # SS 0.5mm                                      |
| Door inner shell material thickness | Stainless Steel Plate 0.4mm                                     |
| Door seal strip                     | PVC Soft Extrusion  |
| Refrigerating Method                | Ventilated  |
| Defrosting method                   | Regular heating tube defrosting                                 |
| Defrost Cycle                       | 6h20min   |
| Temperature Range                   | -10°F-10°F  |
| Evaporator type                     | Copper pipe and aluminum fins                                   |
| Condenser Type                      | Wire on tube  |
| Bottom Style                        | 6 pcs,3 pcs with brake at front and 3 pcs without brake at back |
| Packing                             | Corrugated cardboard+ film-wrapped                              |
| Function                            | CHILLER   |
| Product Certification               | ETL. ETL SANITATION, DOE.NRCAN                                  |